



PALMBRI
GREEN ENERGY INDUSTRY



PRODUCT MANUAL PAD MOUNTED COMPARTMENTAL TRANSFORMER

Version 2026

*ANSI/IEEE-C57.12.00;C57.12.34
CSA-C227.4

TIANJIN PALMBRI INDUSTRY & TRADE Co.,Ltd.

Electric & Green Energy Service provider



www.palmbrienergy.com


PRODUCT OVERVIEW

At BALMBRI, we are constantly striving to introduce new innovations to the Distribution transformer industry, bringing you the highest quality, most reliable transformers. BALMBRI's Pad Mounted Transformer Products are ISO 9001 IEEE, ANSI DOE compliant, emphasizing process improvement in all phases of design, manufacture, and testing.

· Base kVA	45 kVA to 12,000 kVA
· Primary voltage	2400 V to 46,000 V
· Secondary voltage	120 V to 24,940 V
· Basic Impulse Level (BIL)	30kV to 250kV
· STANDARDS	ANSI/IEEE-C57.12.00 and C57.12.34; CSA-C227.4
· NEMA (sound level)	NEMA TR-1
· Third-party approval/recognition	FM Global (Indoor & Outdoor), UL/cUL – available for most ratings

From fabrication of the tanks and cabinets to winding of the cores and coils, to production of arresters, switches, tap changers, expulsion fuses, current limit fuses, bushings (live and dead) and molded rubber goods, BALMBRI does it all.

*Three-phase pad-mounted compartmental type transformer structure

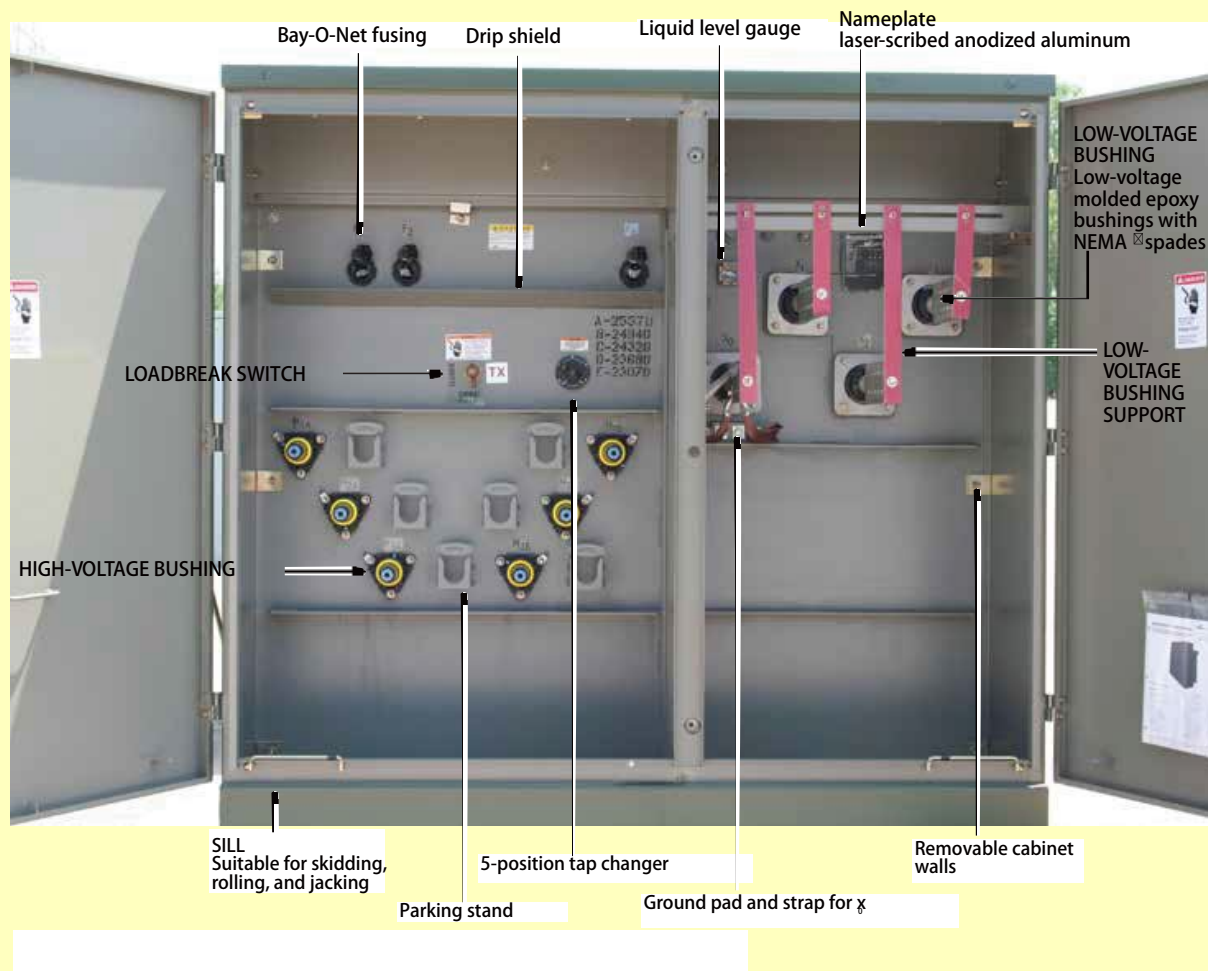

TECHNICAL PARAMETERS

RatedPower(KVA)	H.V(KV)	L.V(V)	Loss(W)		Dimension(mm)			Weight(KG)	
			No-loadloss(W)	On-loadloss(W)	W	D	H	Oil Weight	Total Weight
75KVA	7.62KV 7.2KV	240V480V 480Y/277V 600Y/347V	180	1250	1390	910	1430	120	645
112.5KVA			200	1500	1420	920	1430	138	729
150KVA			280	2200	1510	980	1530	201	989
225KVA			400	3050	1600	1000	1660	230	1195
300KVA			480	3650	1660	1080	1680	260	1415
500KVA			680	5100	1810	1160	1790	325	1905
750KVA			980	7500	2030	1300	2030	535	2755
1000KVA			1150	10300	1651	1549	1854	650	3235
1500KVA			1640	14500	2210	1470	2150	748	5835
2000KVA			2160	20645	2380	1600	2220	950	6430
2500KVA			2680	27786	2480	1650	2330	1020	8865

*Executive standards:ANSI/IEEE-C57.12.00 and C57.12.34; CSA-C227.4

RatedPower(KVA)	H.V(KV)	L.V(V)	Loss(W)		Dimension(mm)			Weight(KG)	
			No-loadloss(W)	On-loadloss(W)	W	D	H	Oil Weight	Total Weight
75KVA	13.8KV 13.2KV 12.47KV 19.92kv	416/240v	171	1240	1400	1250	1500	120	950
112.5KVA			218	1726	1400	1350	1580	138	1160
150KVA			275	2167	1400	1400	1650	201	1250
225KVA			406	3258	1400	1450	1700	230	1420
300KVA			459	3669	1450	1500	1750	260	1560
500KVA			680	5410	1500	1500	1800	325	1810
750KVA			923	7066	1600	1500	1850	535	2480
1000KVA			1150	10300	1700	1650	1900	650	3050
1500KVA			1559	13758	2200	1800	2000	748	4380
2000KVA			1940	18300	2500	2100	2000	950	4930
2500KVA			2300	21200	2780	2150	2000	1020	5500

TECHNICAL PARAMETERS

RatedPower(KVA)	H.V(KV)	L.V(V)	Loss(W)		Dimension(mm)			Weight(KG)	
			No-loadloss(W)	On-loadloss(W)	W	D	H	Oil Weight	Total Weight
75KVA	24.9kv 34.5kv	416/240v	171	1310	1500	1250	1680	280	1150
112.5KVA			220	1800	1560	1330	1750	330	1320
150KVA			280	3270	1600	1500	1790	385	1480
225KVA			380	3130	1630	1580	1850	460	1620
300KVA			460	3840	1650	1600	1880	520	1760
500KVA			680	5660	1700	1660	1900	570	2180
750KVA			930	7770	1740	1700	1950	680	2820
1000KVA			1150	11330	1800	1730	1980	760	3250
1500KVA			1550	15140	2250	2000	2080	1120	4550
2000KVA			1950	19140	2800	2100	2200	1420	5650
2500KVA			2430	22300	3200	2200	2450	1600	6300

STANDARD COMPONENTS

Standard features

Connections and neutral configurations

- Delta - Wye: Low voltage neutral shall be a fully insulated X0 bushing with removable ground strap.
- Grounded Wye-Wye: High voltage neutral shall be internally tied to the low voltage neutral and brought out as the H0X0 bushing in the secondary compartment with a removable ground strap.
- Delta-Delta: Transformer shall be provided without a neutral bushing.
- Wye-Wye: High voltage neutral shall be brought out as the H0 bushing in the primary compartment and the low voltage neutral shall be brought as the X0- bushing in the secondary compartment.
- Wye-Delta: High voltage neutral shall be brought out as the H0 bushing in the primary compartment. No ground strap shall be provided (line to line rated fusing is required).

High and low voltage bushings

- 200 A bushing wells (15, 25, and 35 kV)
- 200 A, 35 kV Large Interface
- 600 A (15, 25, and 35 kV) Integral bushings (dead-front)
- Electrical-grade wet-process porcelain bushings (live-front)

Tank/cabinet features

- Bolted cover for tank access (45-2500 kVA)
- Welded cover with hand hole (>2500 kVA)
- Three-point latching door for security
- Removable sill for easy installation
- Lifting lugs (4)
- Stainless steel cabinet hinges and mounting studs
- Steel divider between HV and LV compartment
- 20" Deep cabinet (45-1000 kVA)
- 24" Deep cabinet (1500-7500 kVA)
- 30" Deep cabinet (34.5/19.92 kV)
- Pentahead captive bolt
- Stainless steel 1-hole ground pads (45-500 kVA)
- Stainless steel 2-hole ground pads (750-10,000 kVA)
- Parking Stands (dead-front)

Valves/plugs

- One-inch upper filling plug
- One-inch drain plug (45-500 kVA)
- One-inch combination drain valve with sampling device in low voltage compartment (750-10,000 kVA)
- Automatic pressure relief valve

Nameplate

- Laser-scribed anodized aluminum nameplate

OPTIONAL FEATURES

High and low voltage bushings

- 200 A (15, 25 kV) bushing inserts
- 200 A (15, 25 kV) feed thru inserts
- 200 A (15, 25 kV) (HTN) bushing wells with removable studs
- High-voltage 600A (1,25,35kV) deadbreak one-piece bushings
- Low voltage 6-, 8-holes spade
- Low voltage 12-, 16-, 20-holes spade (750-2500 kVA)
- Low voltage bushing supports

Tank/cabinet features

- Stainless steel tank base and cabinet
- Stainless steel tank base, cabinet sides and sill
- 100% stainless steel unit
- Service entrance (2 inch) in sill or cabinet side
- Touch-up paint
- Copper ground bus bar
- Bus duct cutout

Special designs

- Factory Mutual (FM)
- UL[®] Classified
- Triplex
- High altitude
- Step-up
- Modulation transformers

Switches

- One, two, or three On/Off loadbreak switches
- 4-position loadbreak T-blade switch
- Delta-wye switch
- 3-position V-Blade selector switch
- 100 A, 150 A, 300 A tap changers
- Dual voltage switch
- Visible break with VFI interrupter interlock
- External visible break (15, 25, and 35 kV, up to 3 MVA)
- External visible break with gauges (15, 25, and 35 kV, up to 3 MVA)

Gauges and devices

- Liquid level gauge (optional contacts)
- Pressure vacuum gauge (optional contacts and bleeder)
- Dial-type thermometer (optional alarm contacts)
- Cover mounted pressure relief device (optional alarm contacts)
- Ground connectors
- Hexhead captive bolt
- Molded case circuit breaker mounting provisions
- External gauges in padlockable box

Overcurrent protection

- Bay-O-Net fusing (Current sensing, dual sensing, dual element, high amperage overload)
- Bay-O-Net expulsion fuse in series with a partial range under oil ELSP current limiting fuse (below 23 kV)
- Cartridge fusing in series with a partial range under-oil ELSP current limiting fuse (above 23 kV)
- Interrupter with ELSP current-limiting fuse
- Vacuum Fault Interrupter (VFI)
- Fuse/switch interlock

Valves/plugs

- Drain/sampling valve in high-voltage compartment
- Globe type upper fill valve

Overvoltage protection

- Distribution-, intermediate-, or station-class surge arresters
- Elbow arresters (for dead-front connections)

Metering/fan/control

- Full metering package
- Current Transformers (CTs)
- Metering Socket
- Control box (optional stainless steel)
- Fan Packages

Coatings (paint)

- ANSI[®] Bell Green
- ANSI[®] #61 Light Gray
- ANSI[®] #70 Sky Gray
- Special paint available per request

Nameplate

- Stainless steel nameplate

Decals and labels

- High voltage warning signs
- Mr. Ouch
- Bi-lingual warning
- DOE compliant
- Customer stock code
- Customer stenciling
- Shock and arc flash warning decal

PRODUCT ADVANTAGE

> Leading technology


- Fully enclosed, fully insulated structure, safe and reliable operation
- Low loss, low noise, low temperature rise, strong load capacity over fixed capacity, strong resistance to sudden short circuit
- Flexible wiring mode, can be used for terminal system, also can be used for ring network system, convenient conversion, improve the power supply reliability
- Easy to operate, maintenance-free, low equipment cost

> Enclosure

- Made of cold rolled high quality hot dip galvanized sheet
- The surface is treated by electrostatic spray, and the paint can not be taken off for 50 years
- Laser numerical control equipment cutting, drilling, bending, to ensure the processing accuracy
- The transformer is a low loss oil-immersed transformer produced by Hengfeng You Electric

> Processing and assembly

- Assembly workers have been trained for at least 6 months
- Secondary wiring is fully automatic equipment cutting to ensure reliable wiring
- Use power tools to ensure proper torque for bolting reinforcement
- The copper bus is CNC punching and bending
- All kinds of experimental tests before leaving the factory to ensure normal operation

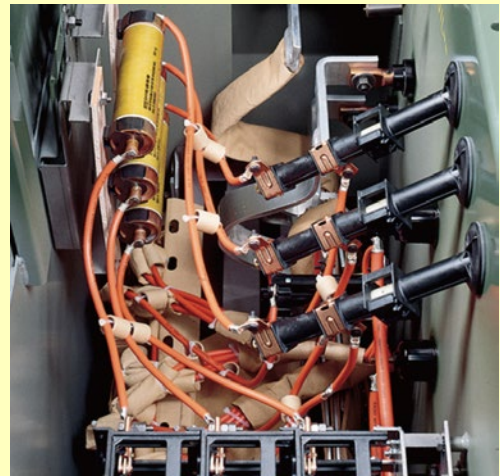

>Structure diagram of Pad Mounted Transformer



01

General inspection


- 1.1 appearance inspection
- 1.2 circuit connection inspection
- 1.3 electrical clearance



02

Mechanical characteristic test

- 2.1 mechanical operation of switch:
- 2.2 the detection of transformer temperature and liquid level is convenient and correct.
- 2.3 the fuse is easy to replace.

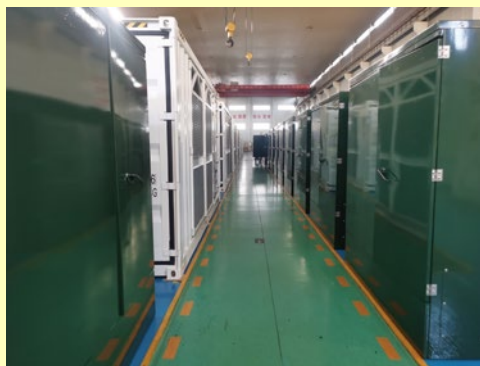

03

TESTING

- 3.1 Customer test witness
- 3.2 Customer final inspection
- 3.3 Zero Sequence Impedance Test
- 3.4 Heat Run Test
- 3.5 ANSI[®] Impulse Test
- 3.6 Audible Sound Level Test
- 3.7 RIV (Corona) Test
- 3.8 8- or 24-Hour Leak Test






INSTALLATION

1. Hoisting with crane or elevator

- The rear part of the pad mounted transformer is heavy and the front part is light. Improper use of the hook or crane may cause serious damage to the transformer or its accessories or personal injury.
- Check its weight and the bearing capacity and service condition of all hooks or lifting equipment. Do not use worn or damaged steel cables or lifting rings. Do not use lifting equipment with lifting capacity less than the weight shown on the nameplate of the box transformer.
- Do not use the cable chain ring to bolt the equipment or lifting lug to lift the transformer. The angle between the lifting steel cable and the vertical line shall not exceed 30°

2. Installation of pad mounted transformer cable accessories

Transformer accessories can be attached with one-way bushing joint, two-way bushing joint, 200A elbow cable head, T-shaped cable head, one-way joint, two-way joint, elbow lightning arrester, live display, fault indicator, insulating cap, etc.

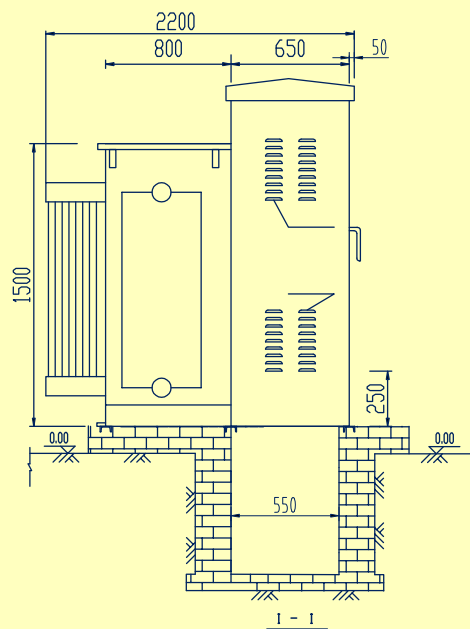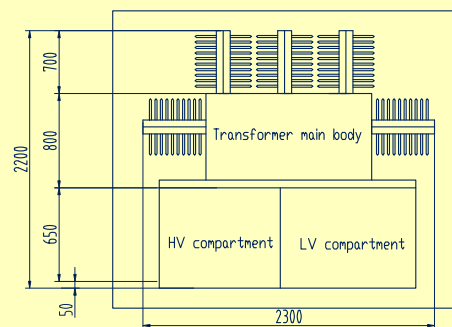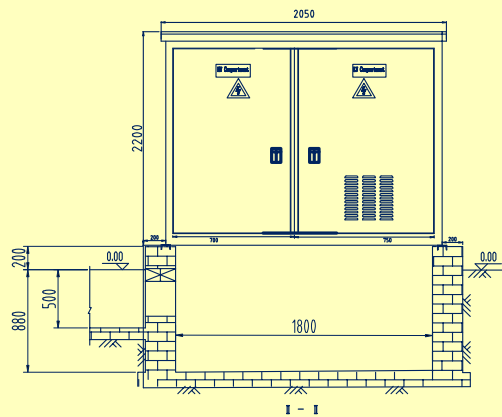

CARRY&PACKAGE



PRE-SALE SERVICE:

1. ISO certified excellent Manufacturer
2. Third-party authoritative certifications: CE, CB, SASO, CCC, UL, CSA etc
3. Flexible payment: T/T, LC, O/A
4. Sufficient inventory, fast delivery time and long validity of the price
5. The whole process of picture tracking can be realized in production and transportation
6. Experienced professional sales team and a strong technical team
7. Sincerely invite customers to visit the company for guidance



AFTER-SALES SERVICE:

1. If there is any quality problem after receiving the goods, you can return the goods free of charge or ship new products
2. We provide our customers with a 1-year product warranty
3. Provide 24-hour, 365-day technical guidance worldwide
4. The VIP customers enjoy our promotional activity
trained by management consultants, is able to provide professional solutions for customers.
4. Our technical team is ready for 24-hour technical support worldwide.
5. Our customer service team ensures on time delivery.



TIANJIN PALMBRI INDUSTRY & TRADE Co.,Ltd.
No. 1988 of Yingbin Avenue, Free trade Zone of Tianjin (CBD), 300450, Tianjin, China
+86 153 2010 1753
info@palmbrienergy.com
info@palmbri.com
www.palmbrienergy.com