



PALMBRI
GREEN ENERGY INDUSTRY

PRODUCT MANUAL SINGLE-PHASE POLE MOUNTED TRANSFORMER

Version 2026

*ANSI, IEEE, CSA, IEC60076

TIANJIN PALMBRI INDUSTRY & TRADE Co.,Ltd.

Electric & Green Energy Service provider



PRODUCT OVERVIEW

The BALMBRI overhead transformer may be used alone for the supply of a single phase load or as one of three units in a bank for the supply of a three phase load. The unit may be direct mounted to a wooden or concrete pole, or cluster mounted on a pole for three phase use. Our single phase overhead distribution transformer is commonly used in various places including rural areas, remote regions and scattered villages to provide high quality power supply for daily lighting, agricultural production and industrial plants.

Offers 2 basic transformer types and 2 kinds of metal core types Conventional type and Complete Self Protect type, and for the transformer core, 2 types of materials are available: CRGO. core and amorphous metal core.

Executive Standards

IEEE Std C57.12.00TM-2000 standard – IEEE Standard for Standard General Requirements for Liquid-Immersed Distribution, Power, and Regulating Transformers.

IEEE Std C57.12.20TM-2005 standard – IEEE Standard for Overhead-Type Distribution Transformers, 500kVA and Smaller: High Voltage, 34500V and Below; Low Voltage, 7970/13800V and below.

IEEE Std C57.12.31TM-2010 standard – IEEE Standard for Pole Mounted Equipment – Enclosure Integrity

IEEE Std C57.12.35TM-1996 standard – IEEE Standard for Bar Coding for Distribution Transformers

IEEE Std C57.12.90TM-2006 standard – IEEE Standard Test Code for Liquid-Immersed Distribution, Power, and Regulating Transformers.

IEEE Std C57.12.91TM-2001 standard – IEEE Guide for Loading Mineral-Oil-Immersed Transformers.

IEEE Std C57.154TM-2012 standard (Pending Approval)– IEEE Standard for the Design, Testing and Application of Liquid-Immersed Distribution, Power and Regulated Transformers using High-Temperature Insulation Systems and Operating at Elevated Temperatures (ASTM) American Society for Testing Materials. NEMA TR 1-1993 (R2000) – Transformers, Regulators and Reactors, Table 0-2 Audible Sound Levels

10 CFR Part 431 – Department of Energy – Energy Conservation Program for Commercial Equipment: Distribution Transformers Energy Conservation Standards; Final Rule.



PRODUCT FEATURE



Main advantages of single-phase pole mounted transformers made by PALMBRI

- (1) Cover mounted high voltage porcelain bushings with eyebolt terminals are mounted on flat embossments on the cover and have undercut gasket seats for improved sealing. The eye bolt connectors are cast bronze plated with tin to accommodate both aluminum and copper conductors.
- (2) One-piece fasten ring prolongs the life of the transformer, facilitates inspection and maintains even pressure around the entire rim. It combines with a specially formed tank rim, drawn cover and gasket to form an effective seal which will not deteriorate with age.
- (3) Low voltage tank-wall bushing terminals are clamp type and tin plated.
- (4) Tank is equipped with self-sealing pressure release device.
- (5) Support lugs, welded to the tank, conform to ANSI standards are made of hot-rolled steel.
- (6) Tank is supplied with a tank grounding bolted ring-type connector suitable for use with copper or aluminum.



⌚ CONVENTIONAL TYPE



The transformer is cylinder sealing structure. Each one is fixed with grounding devices, hooks, supporting lugs which conforms to ANSI standard, and one or two high voltage bushing on the cover, low voltage bushing on the wall of the tank and eyebolt connecting terminals. The tap changer should be adjusted basing on the instruction after the power off.

⌚ COMPLETE SELF PROTECT TYPE

This type of transformers are CSP type, which can protect itself from thunder and lightning, short circuit and protect the transiting and distribution line from current failure because of self-malfunction.

Except from some similarities such as cylinder tank, hooks, lifting lugs, grounding devices, nameplates, core and winding with the conventional type. This type of transformers have characteristics and devices as follows:

One or two high voltage bushings are on the cover with fuse.


One or two arresters are installed on the wall of the tank, whose top end is near to the high voltage bushing, and connected to the bushing by a copper strip. One secondary breaker switch is above the winding inside the tank, and here are operating handle, overload reset and signal light,

Low voltage bushing is educed from the wall of the tank, grounding device is fixed to position X2. One end of the single bushing leads out through the high voltage bushing, the other end is ground connection.



TECHNICAL PARAMETERS

---3-75kva---

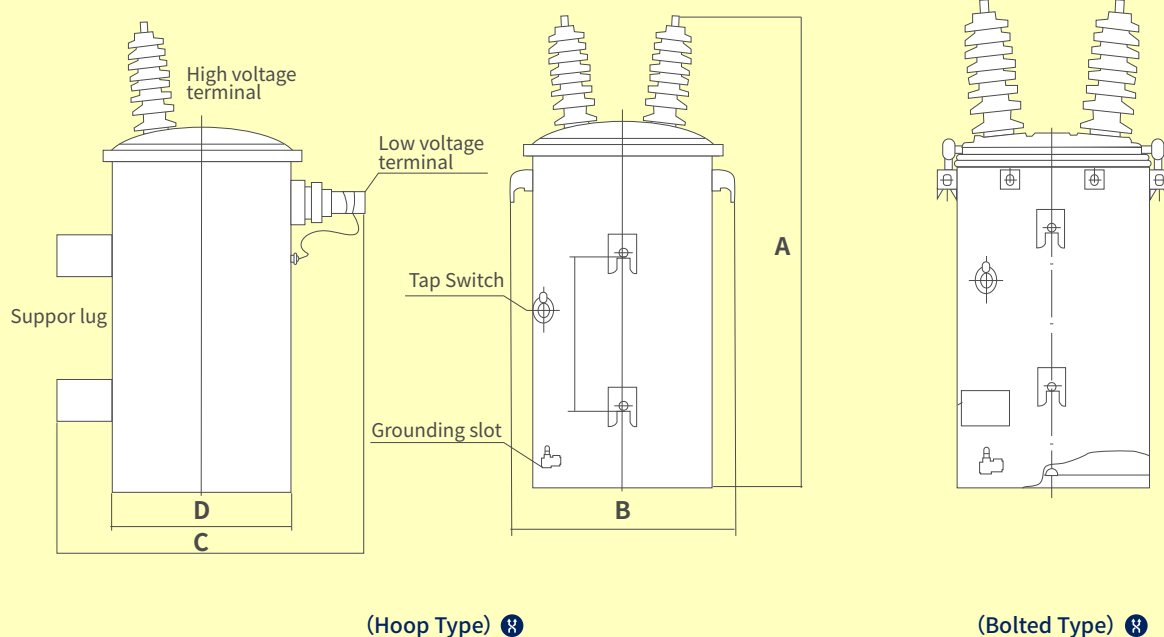


Technical Data for D11 Series Single-Phase Pole-Mounted Distribution Transformer(CRGO Core)

Rating (KVA)	H.V(V)	Tapping Range (%)	L.V(V)	Loss(W)		Dimension(mm)					Weight(kg)		
				No Load Loss	Full Load Loss	A	B	C	D	E	Oil Weight	Oil Content	Total Weight
3	33000/ 19000	±2×2.5% or others	120-240 240-480 250-500 or others	9	45	800	400	500	300	286	10	11.1	70
5	30000/ 17321			19	75	860	430	510	340		30	33.3	92
10	20000/ 11547			36	120	965	450	515	330		28.8	32	135
15	13800/ 7967			50	195	1015	480	545	360		37	41.1	155
25	13200/ 7620			80	290	1015	500	570	380		45	50	185
37.5	12000/ 6930			105	360	1075	580	650	460	591	58	64.4	265
50	11000/ 6350			135	500	1175	580	650	460		69	76.7	300
75	or			190	650	1175	761	706	496		102.6	114	380
100	others			210	850	1280	934	754	524		108.0	120	460
167				350	1410	1460	830	890	660		138	153.3	680
250				500	2000	1570	960	950	660		250	277.8	990
333				650	2500	1660	960	960	660		300	333.3	1160

TECHNICAL PARAMETERS

---75-167kva---

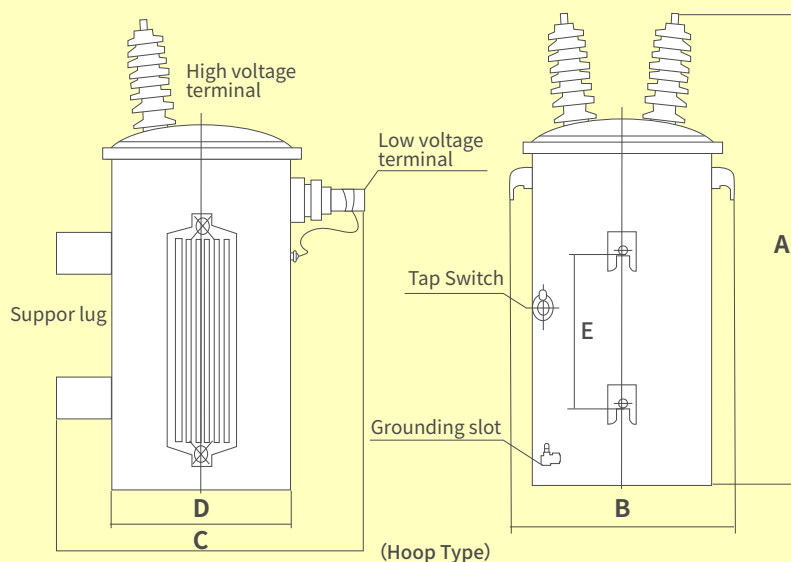

Technical Data for DH15 Series Single-Phase Pole-Mounted Distribution Transformer(Amorphous Metal Core)

Rating (KVA)	H.V(V)	Tapping Range (%)	L.V(V)	Loss(W)		Dimension(mm)					Weight(kg)		
				No Load Loss	Full Load Loss	A	B	C	D	E	Oil Weight	Oil Content	Total Weight
3	33000/ 19000	$\pm 2 \times 2.5\%$ or others	120-240 240-480 250-500 or others	8	45	800	400	400	300	286	10	11.1	60
5	30000/ 17321			8	75	840	400	480	310		35	38.9	75
10	20000/ 11547			12	120	955	500	565	380		35	38.9	155
15	13800/ 7967			15	195	975	500	565	380		37	41.1	160
25	13200/ 7620			18	290	1025	530	600	410		45	50	210
37.5	12000/ 6930			30	360	1075	580	650	460	591	54	60	305
50	11000/ 6350			32	500	1075	680	750	560		89	98.9	375
75	or			45	650	1215	730	820	610		123	136.7	545
100	others			50	850	1175	875	840	610		108	120	585
167				65	1410	1470	940	840	610		140	155.6	650
250				90	2000	1560	1260	960	660		250	277.8	950
333				120	2500	1660	1260	960	660		300	333.3	1200

TECHNICAL PARAMETERS



Technical Data for D11 Series Big Capacity Single-Phase Pole-Mounted Distribution Transformer(CRGO Core)

Rating (KVA)	H.V(V)	Tapping Range (%)	L.V(V)	Loss(W)		Dimension(mm)			Weight(kg)	
				No Load Loss	Full Load Loss	L	W	H	Oil Weight	Total Weight
100	13200/ 7620	$\pm 2 \times 2.5\%$	120/240/480 or 120-240	210	850	1020	770	1260	94	530
167				350	1410	1290	870	1265	138	680
250	or 11000/ 6350	or 0	240-480	500	2000	1460	1080	1380	250	990
333				650	2500	1570	1230	1395	300	1160



Technical Data for D11 Series 30kv-33kv Single-Phase Pole-Mounted Distribution Transformer

Rating (KVA)	H.V(V)	Tapping Range (%)	L.V(V)	Loss(W)		Dimension(mm)			Weight(kg)	
				No Load Loss	Full Load Loss	L	W	H	Oil Weight	Total Weight
10	33000/ 19000	±2×2.5%	120-240	47	165	590	510	1000	51	160
15				58	285	605	600	1030	63	208
25				66	448	620	700	1090	82	260
37.5	30000/ 17320	or	240-480	88	574	650	730	1195	97	325
50				110	700	680	760	1300	115	390
75	20000/ 11547	others	or others	175	910	730	840	1340	140	460
100				215	1300	870	920	1350	170	550
167				308	1830	970	1240	1390	195	650
250				608	2900	1200	1420	1650	250	850

OUR FACTORY

CUSTOMER-ORIENTED CREATE VALUE FOR CUSTOMERS MAKE FRIENDS ALL OVER THE WORLD



FACTORY DISPLAY



FACTORY DISPLAY

BALMBRI has 22000 square meters of modern plant, with a monthly delivery capacity of up to 2000 Single-Phase Transformer, and has fully passed the ISO9001, ISO14001, SA8000, BSCI and other market access standards reviewed and issued by international certification bodies. At present, the company has 10 senior engineers, 30 senior technicians and more than 300 employees, with an annual output value of US \$100 million



CASE

BALMBRI has always been committed to providing the best quality Single-Phase Transformer products for global customers



Case show

Single-Phase overhead transformer is usually used for urban and rural power distribution



PRE-SALE SERVICE

- 1.ISO certified excellent Manufacturer
2. Third-party authoritative certifications: CE, CB, SASO, CCC,UL, CSA etc
3. Flexible payment: T/T, LC, O/A
4. Sufficient inventory, fast delivery time and long validity of the price
5. The whole process of picture tracking can be realized in production and transportation
6. Experienced professional sales team and a strong technical team
7. Sincerely invite customers to visit the company for guidance

AFTER-SALES SERVICE

1. If there is any quality problem after receiving the goods, you can return the goods free of charge or ship new products
2. We provide our customers with a 1-year product warranty
3. Provide 24-hour, 365-day technical guidance worldwide
4. The VIP customers enjoy our promotional activity
trained by management consultants, is able to provide professional solutions for customers.
4. Our technical team is ready for 24-hour technical support worldwide.
5. Our customer service team ensures on time delivery.



TIANJIN PALMBRI INDUSTRY & TRADE Co.,Ltd.
No. 1988 of Yingbin Avenue, Free trade Zone of Tianjin (CBD), 300450, Tianjin, China
+86 153 2010 1753
info@palmbrienergy.com
info@palmbri.com
www.palmbrienergy.com